

JUKI®

LOWEST COST OF OWNERSHIP

G-Star

Above & beyond your expectations



Sales & Service by
JUKI

PERFORMANCE

Machine Alignment Capability	2Cmk @ ±12.5 microns 6 sigma
Process Alignment Capability	2Cpk @ ±25 microns 6 sigma
Core Cycle Time (excluding printing & cleaning time)	< 8.5 secs
Product Changeover Time	< 3 mins
New Product Set-up Time	< 10 mins

BOARD HANDLING

Max. Size (L x W)	400 mm x 340 mm
Min. Size (L x W)	50 mm x 50 mm
Thickness	0.4~6 mm
PCB Thickness Adjustment	Manual (Auto is option. PCB max. width reduced to 310 mm)
PCB max. weight	3 kg
PCB edge clearance	3 mm
PCB Bottom Clearance	15 mm (7 mm with optional auto PCB thickness adjustment)
PCB Warpage	Max. 1% diagonally
Clamping Method	Top clamp (manual) and motorized side clamp
Support Method	Magnetic support pins, bars, blocks, Vacuum suction
Conveyor Direction	L to R, R to L, R to R, L to L (software control)
Conveyor Height	900 ± 40 mm
Conveyor Speed (max.)	1,500 mm/s
Conveyor Width Adjustment	Automatic

OPERATOR INTERFACE

Hardware	LCD Monitor, Mouse & Keyboard
Operating System (OS)	Windows 7 or Higher
Control Method	Industrial PC controlled
I/O Interface	SMEMA Standard

OPTIONS

Paste Rolling Diameter Monitoring System
Stencil Apertures Inspection System
Auto Table Adjustment for PCB Thickness
SPI Closed-loop
External Barcode Scanner for PCB Traceability
Handheld Barcode Scanner for stencil, solder paste, squeegee traceability

PRINTING PARAMETERS


Stencil Frame Size (L x W)	Adjustable, 470 mm x 370 mm to 737 mm x 737 mm
Print Gap (snap-off)	0~20 mm
Printing Table Adjustment Range	X: ±3 mm, Y: ±7 mm Θ : ± 2°
Print Speed	6~200 mm/s
Squeegee Pressure	0.5~10kg (program control)
Squeegee Type	Std.: Metal, Option: OPC, rubber
Squeegee Angle	Std. 60°, Option 45°, 50°, 55°
Cleaning System	Auto wet, dry, vacuum (software select)

OPTICAL SYSTEM

Field-of-View (FOV)	8 mm x 6 mm
Fiducial Types	Circle, triangle, square, diamond, cross
Fiducial size	0.5~3.0 mm
Vision Methodology	CCD camera look up & down
2D inspection	Max.100 windows to inspect missing & insufficient [std.]

FACILITIES REQUIREMENT

Power supply	AC220V ± 10% 50/60Hz
Power Consumption	2.5kW
Air Supply	4 ~ 6Kgf/cm ²
Dimension (excluding signal tower)	1,158 mm (L) x 1,362 mm (W) x 1,463 mm (H)
Machine Weight	1,000kg

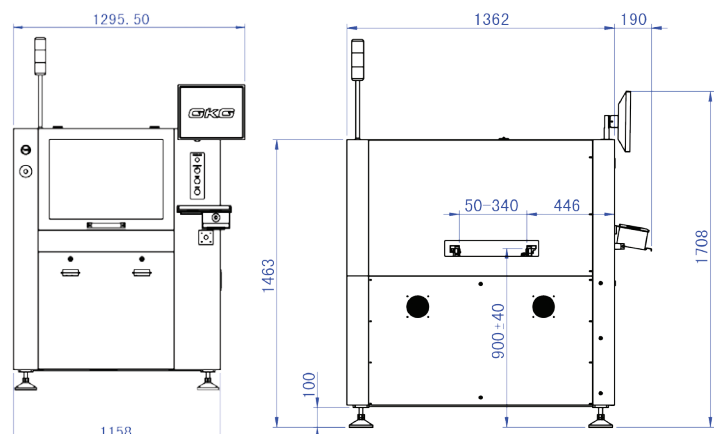

JUKI®

MANUFACTURER : JUKI CORPORATION

INQUIRY : JUKI AUTOMATION SYSTEMS CORPORATION

2-11-1, Tsurumaki, Tama-shi, Tokyo 206-8551, JAPAN
TEL.81-42-357-2293 FAX.81-42-357-2285

<http://www.juki.co.jp>

North America Headquarters:

Juki Automation Systems
5151 McCrimmon Parkway
Suite 200
Morrisville, NC 27560
Phone: 919-460-0111
Email: sales@jas-smt.com
www.jukiamericas.com

North America Sales Office:

Juki Automation Systems
412 Kato Terrace
Fremont, CA 94539
Phone: 510-249-6700

JUKI Specifications and appearance may be changed without notice.
This catalogue prints with environment-friendly soyink on recycle paper.

January-2018/Rev.00